


Township of East Rockhill

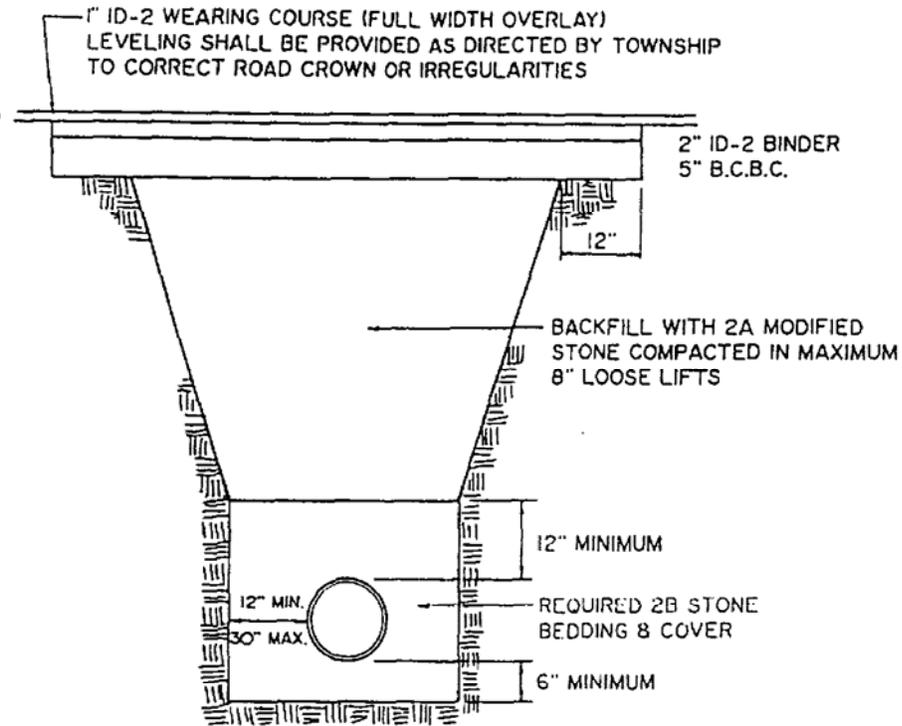

Notes:

1. Developer/Contractor shall be responsible for proper implementation of safety requirements in conformance to all Federal and State Department of Labor and Occupational Safety and Hazard Administration Regulations.
2. Backfill for new road construction may be select earth backfill when suitable material is available as determined by the Township.
3. Paving/base cross-section for new road construction shall be 8 inches of AASHTO #1 stone (ballast) with 2 inches of screenings; 1 1/2 inch ID-2 binder; 1 inch ID-2 wearing.
4. Roadway crown shall be 3/8 inch per foot.
5. 3 inch temporary patch of BCBC shall be provided and maintained for less than 30 days prior to final restoration of existing roadway or driveway. Temporary patch shall be removed with final restoration performed no more than 90 days from date of sewer installation providing testing has been satisfactorily accomplished and no settlement has occurred.

EAST ROCKHILL TOWNSHIP SEWER STANDARDS

Not to Scale SCALE:	PIPE BEDDING REQUIREMENTS AND TYPICAL TRENCH CROSS-SECTION WITHIN RIGHT-OF-WAY; AND BENEATH ALL EXISTING ROADWAYS AND DRIVEWAYS (PUBLIC OR PRIVATE)	S-16
DATE 1/92		DWG. No.