

Township of East Rockhill

**R-7506 Series Floor Box Frames and Lids**

Flange boxes placed in slab provide access to extension stems which operate gate valves, plug valves or sluice gates at a lower level.


Furnished with removable lid that can be drilled and tapped for pipe extension. Made in various lengths to fit slab thickness.

Specify

1. Complete catalog number
2. Length of "I" dimension
3. Size of tapped hole in cover when required

| Catalog No. | Dimensions in inches |        |    |    | Maximum Slab Thickness |
|-------------|----------------------|--------|----|----|------------------------|
|             | A                    | B      | C  | I  |                        |
| R-7506-A    | 5 1/2                | 3 1/2  | 4  | 7  | 18" MAX                |
| R-7506-B    | 6                    | 4      | 5  | 8  | 24" MAX                |
| R-7506-C    | 7 1/2                | 5 1/2  | 6  | 9  | 20" MAX                |
| R-7506-D    | 9 1/2                | 7 1/2  | 8  | 12 | 17" MAX                |
| R-7506-E    | 11 1/2               | 9 1/2  | 10 | 13 | 16" MAX                |
| R-7506-F    | 13 1/2               | 11 1/2 | 12 | 15 | 24" MAX                |

\*Manufactured to dimension required  
Specify slab thickness when ordering

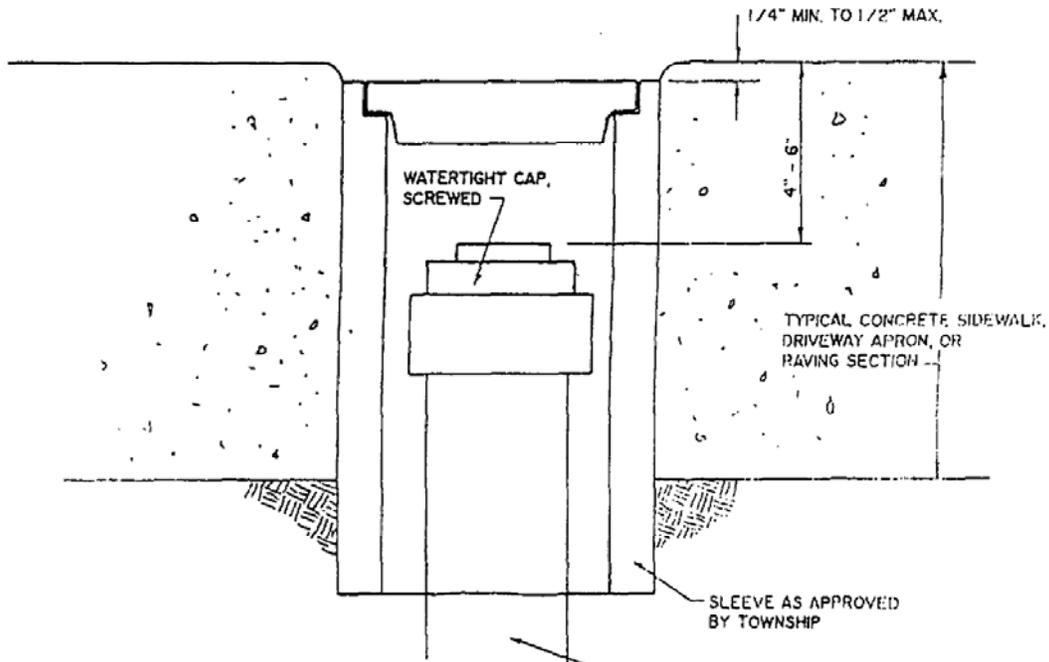

NOTES:

1. Sleeve shall be ductile iron casing as manufactured by NEENAH Foundry (R 7506 Series Floor Box Frames and Lids); or equal as approved by Township.
2. R-7506-D shall be provided for 4 inch risers; R-7506-E shall be provided for 6 inch risers. Length of sleeve shall be 12 inches or as approved by Township.

EAST ROCKHILL TOWNSHIP SEWER STANDARDS

|                       |   |      |
|-----------------------|---|------|
| Not to Scale<br>SCALE | SLEEVE PROCEDURE FOR CLEANOUTS AND VENT PIPES | S-12 |
| 1/92<br>DATE          |   |      |